

FOUNTAINS | WALL RECESSED HYDRATION STATION - CHILLED

SPECIFICATION SHEET



This wall recessed hydration station combo has two activation methods. The bottle filler includes an electronic sensor for a contactless (touch free) activation and a 30 second shut off timer. The radii drinking fountain is activated via a vandal-resistant push-button.

Suitable for public buildings, gymnasiums, sports complexes, hospitals, schools, and offices.

MODEL

Model: AC-M8WREBFY
SKU: DFAQWRHS

DIMENSIONS

Height: 1143mm
Width: 502mm
Depth: 483mm
(287mm recessed)

CERTIFICATIONS



FEATURES


- + Drinking Fountain & Bottle Filler In One
- + High Efficiency Cooling System & Refrigerant R-134a
- + 30 L/h Chilling Capacity
- + Contactless Bottle Filler (Infrared Sensor with 30 sec shut-off timer)
- + Manual Vandal-Resistant Drinking Fountain (Push Button)
- + Anti-Splash Basin Design
- + Bottle Counter To Track Usage
- + Contains Antimicrobial Materials
- + Perfect For Schools, Sports Complexes, Hospitals, Gyms and Offices

OPTIONS

- + Full Manual Activation
- + Non-Chilled Water
- + Quasar UVC-LED Filtration

FOUNTAINS | SURFACE MOUNTED VERSAFILLER - CHILLED

TECHNICAL INFORMATION

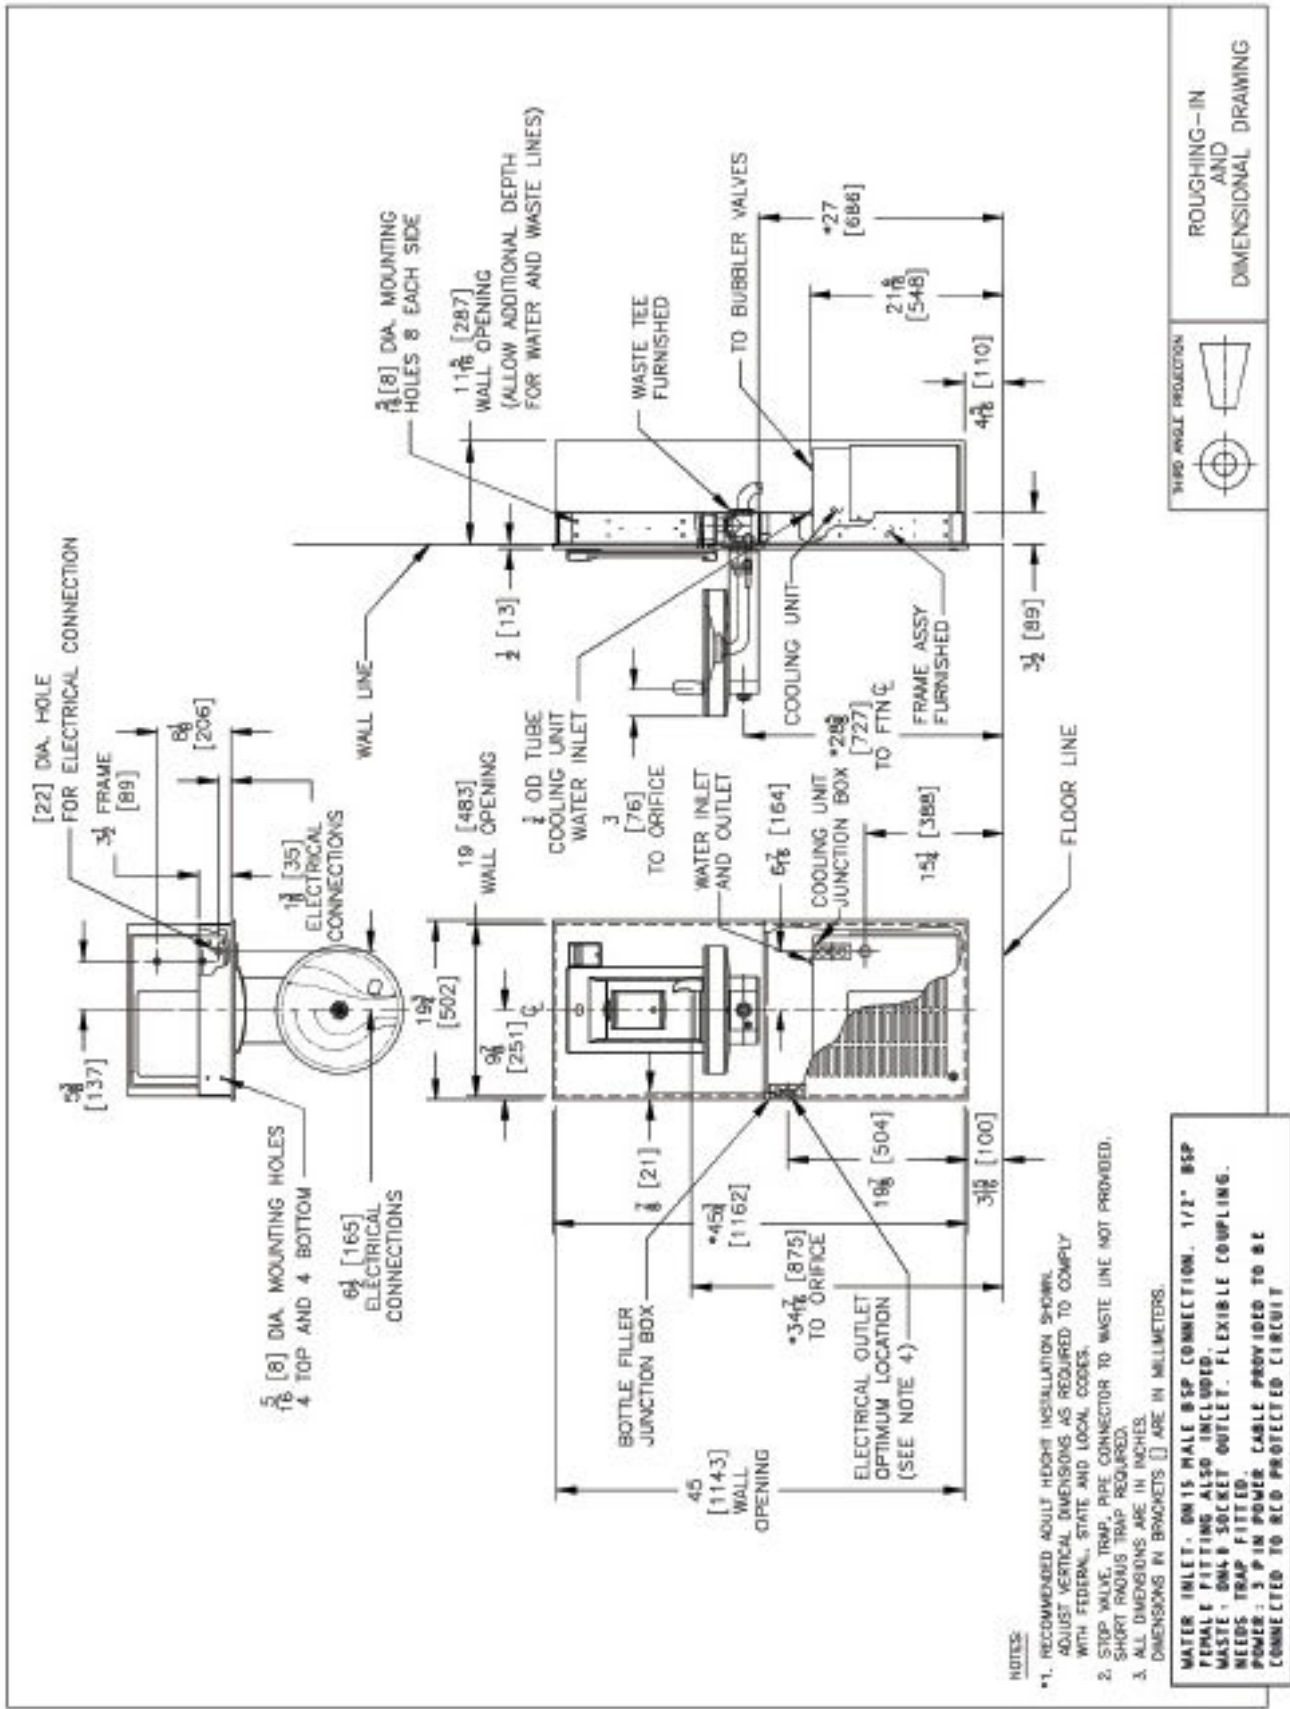

FOUNTAINS | SURFACE MOUNTED VERSAFILLER - CHILLED

TECHNICAL INFORMATION

MODEL CODE	AC-M8WREBFY
Activation	Bottle Filler: Contactless (Infrared sensor) Drinking Fountain: Manual (Push-button)
Sensor Coverage	Up to 5cm (approx.)
Filtration	Filter (optional), Built-in 100 micron strainer
Disinfection	Available with Quasar UVC-LED (Model: AC-MW8REBFQY)
Auto-Off Water Flow	Bottle Filler: Yes; Drinking Fountain: No
Water Connections	Inlet: 1/2" BSP connector, Drain: 40mm Female Socket (Not trapped)
Exterior	Antimicrobial ABS Plastic, Brushed Stainless Steel
Chassis	Heavy Duty Galvanised Steel
Dimensions	1143(H) x 502(W) x 483(D) (287 recessed)
Alcove Height	265 mm
Net Weight	64 kg
Power Supply	220-240V, 50/60 Hz
Cooling Performance	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)
Full Load Amps	2.2 A
Rated Watts	347 W
Energy system	Refrigeration is on only when in use or if water temp increases during long period of standby
Country of Origin	Mexico
Certifications	WaterMark, ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS)
Warranty	1 Year Full, 2 Years Parts Only