

URBAN TEE VALVE
DISASSEMBLY FROM AN A280 BASIN PROCESS



STEP 1

LOCATE VALVE BUTTON ON FRONT END OF THE
A280 BASIN

URBAN TEE VALVE
DISASSEMBLY FROM AN A280 BASIN PROCESS



AFTER REMOVING THE ACCESS DOOR.
USE A 10mm RING SPANNER TO LOOSEN 2 X OFF M6 HEX BOLTS
FROM VALVE MOUNTING BUSH. THIS WILL ALLOW THE
VALVE BODY TO BECOME LOOSE.

URBAN TEE VALVE
DISASSEMBLY FROM AN A280 BASIN PROCESS



PULL THE BUTTON AND VALVE BODY FORWARDS ONCE THE M6 HEX SCREWS HAVE BEEN MADE LOOSE FROM THE PREVIOUS STEP.

THIS WILL EXPOSE THE FLAT SPANNER SECTIONS ON EITHER SIDE OF THE STUFFING BOX.

URBAN TEE VALVE
DISASSEMBLY FROM AN A280 BASIN PROCESS



USE THE URBAN SUPPLIED SPANNER TO LOOSEN THE
STUFFING BOX FROM THE VALVE BODY

URBAN TEE VALVE
DISASSEMBLY FROM AN A280 BASIN PROCESS



STEP 5

YOU WILL NEED TO HOLD THE VALVE BODY ON THE INSIDE OF THE BASIN WITH YOUR HAND, TO PREVENT IT FROM TURNING WHEN YOU LOOSEN THE STUFFING BOX.

LOOSEN IN A CLOCKWISE DIRECTION


URBAN TEE VALVE
DISASSEMBLY FROM AN A280 BASIN PROCESS



CONTINUE TO LOOSEN UNTIL IT BECOMES EASY ENOUGH
TO LOOSEN BY HAND

LOOSEN IN A CLOCKWISE DIRECTION

URBAN TEE VALVE
DISASSEMBLY FROM AN A280 BASIN PROCESS

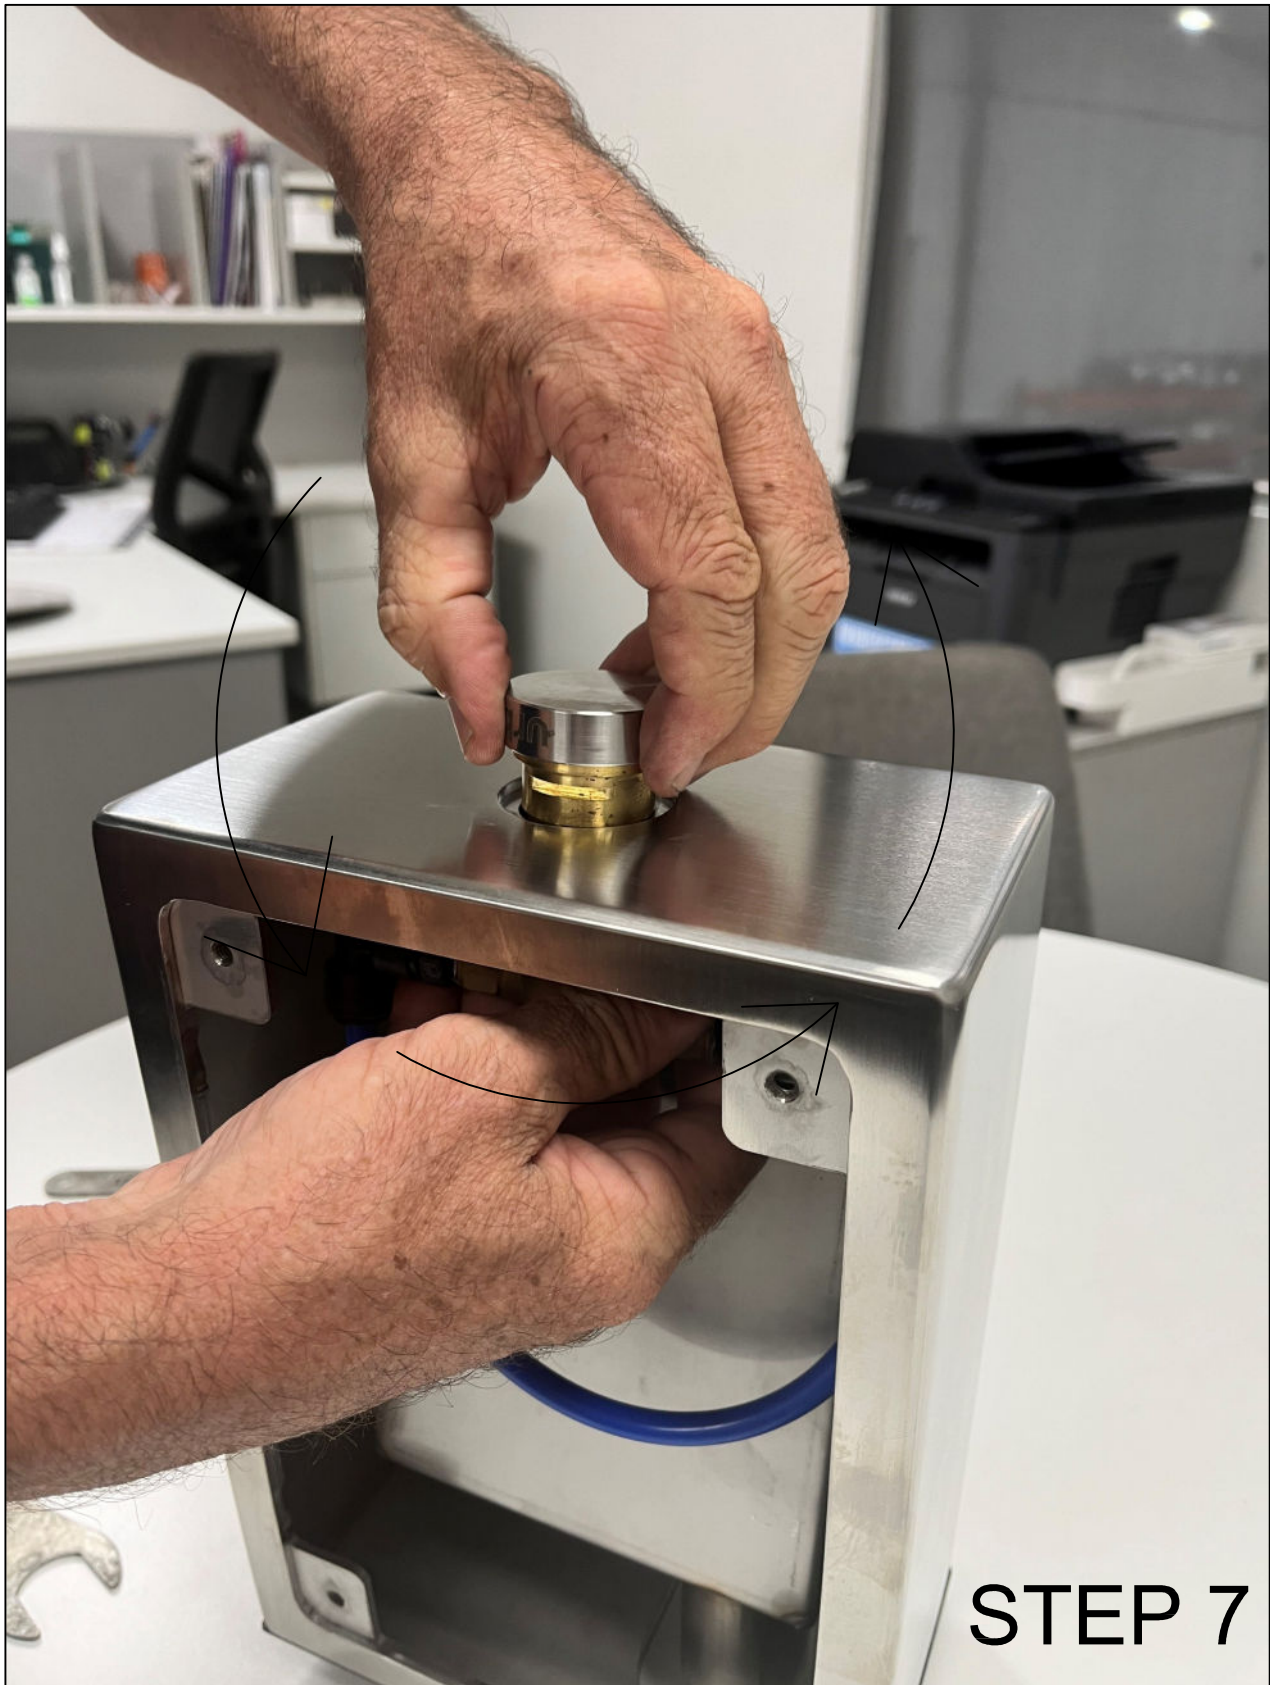

LOOSEN THE REST OF THE THREAD BY HAND

LOOSEN IN A CLOCKWISE DIRECTION

URBAN TEE VALVE
DISASSEMBLY FROM AN A280 BASIN PROCESS



STEP 8

PULL THE STUFFING BOX AND BUTTON OUT OF THE VALVE BODY.